

# Homtime

## M9 Wood Echo

Bluetooth Alarm Clock Speaker Box



## Table of contents

1 Features .....	1
2 Included in this Package .....	2
3 Technology Specification .....	2
4 Diagram of the LED display& the Button .....	3
5 Operating Instruction of the Button and DC & Aux-in Jack ...	5
5.1 Time Settings .....	5
5.2 Alarm Settings .....	5
5.3 Date Settings .....	6
5.4 Bluetooth Function .....	7
5.5 Hands free Function .....	8
5.6 Aux in Jack .....	8
5.7 Temperature Display Setting .....	8
5.8 USB outlet port .....	8
6 Playing and Connection diagram .....	9
7 Disposal of your old product .....	9

Dear customer, thanks for your purchasing M9

Please read all safety instructions before proceeding for your safety and proper usage.

## 1 Features

- Pure wood, texture surfaces, stylish appearance.
- Integrate clock, alarm, Bluetooth speaker and thermometer function all in one.
- LED digital display.
- Sensory touch buttons.
- 3.5mm stereo line-in cable (included) for playing other audio devices.
- Easily paired with Bluetooth-enabled devices, enjoy music freely.
- Simple appearance, easy configuration.
- Built-in microphone, have a clear call through Bluetooth hands-free function.
- Built-in high-quality speakers, bright treble, deep bass. Music performance beyond your imagination.
- 5V 2.1A USB outlet port for traditional USB charging for most devices

## 2 Included in this package

(Please check the accessories included in this package after purchasing)

▪ M9 main unit	1 PC	▪ Warranty card	1 PC
▪ 3.5mm jack audio cable	1 PC	▪ Certification	1 PC
▪ Power Adaptor	1 PC	▪ User manual	1 PC

## 3 Technology Specification

- Bluetooth Version: 4.0
- Bluetooth Profiles: A2DP, AVRCP, HFP, HSP
- Bluetooth Range: 10 M
- Output Power: RMS 3W+3W
- Speaker: 4Ω 3W 1.5in
- Frequency Response: 60Hz-20KHz
- S/N Ratio: > 70dB
- Distortion: <1%
- Cable: 3.5mm jack audio cable
- Power Adaptor: AC100 - 240V 50/60Hz
- DC 5V 3A
- Product Net Weight: 0.81kg
- Product Dimension: 221X140X68mm



## 4 Diagram of the LED Display& the Button

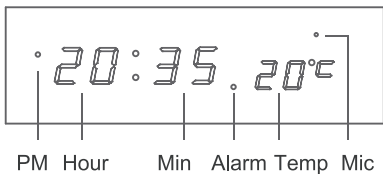


Fig.1 LED Display

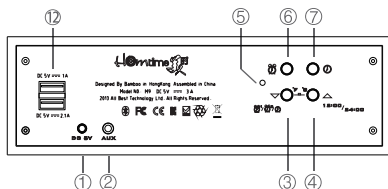


Fig.2 DC&AUX JACK

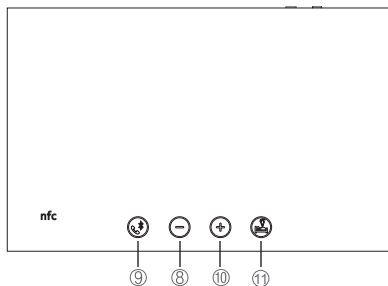


Fig.3 The Top Button

① DC 5V

Power jack

② AUX

Support other audio sources (3.5mm adapter)

③ ▼

turn on alarm/turn off alarm/ stop alarm

④ ▲ 12:00 / 24:00

Adjust time /switch hour mode/ stop alarm

⑤ Temp

Temperature sensor

⑥ ⌚

Set alarm/stop alarm

⑦ ⌚

Set time/stop alarm

⑧ ⊖

Volume down

⑨ 📶

Pause/play/answer call/end call/turn on or off Bluetooth

⑩ ⊕

Volume up

⑪ Snooze

Press 🖱️ to adjust the LED brightness

⑫ USB outlet port

5 Operating Instruction of the Button and DC & Aux-in Jack

Connect the adaptor with the unit to turn on the unit. The Time display on the LED screen will be random during the first use of the unit; the figure on the right side is the room temperature. There is about 2 degree difference between the displaying temperature and the actual temperature.

## 5.1 Time Settings

Press  $\text{12:00}/\text{24:00}$  to switch 12-hour mode and 24 -hour mode. In 12- hour mode, a single hour figure begins to flash; in 24 -hour mode, both of the two hour figures begin to flash. After confirm the hour mode, press  $\odot$ , the HOUR figure begins to flash. Press  $\odot/\text{⌚}$  to adjust the HOUR; Press  $\odot$  again, the MINUTE figure beings to flash. Press  $\odot/\text{⌚}$  to adjust the MINUTE. To exit time setting, Press  $\odot$  to confirm your setting. (Idling for 15 seconds also exits time setting automatically)

## 5.2 Date Settings

After time setting, it switches to Date settings automatically. The MONTH figure begins to flash. Press  $\odot/\text{⌚}$  to adjust the MONTH; Press  $\odot$  to confirm it and the DATE figure begins to flash, Press  $\odot/\text{⌚}$  to adjust the DATE, and then Press  $\odot$  to confirm and exit the settings.

## 5.3 Alarm Settings

Press ▼ to turn on alarm. The alarm indicator light begins to flash on the LED screen in every 2 seconds. The alarm clock only works for one time. Press ▼ again, the alarm indicator light stops flashing. The alarm clock works everyday (See Fig 4)

Press ▼ to turn on alarm. The alarm indicator light begins to display on the LED screen. (See Fig.4) Press ⌚ to set alarm time, the HOUR figure begins to flash, Press ⌚/⌚ to adjust the HOUR; Press ⌚ again, the MINUTE figure begins to flash. Press ▼/▲ to adjust the MINUTE. To exit alarm setting, press ⌚ to confirm your setting. (Idling for 15 seconds exits alarm setting automatically). When alarm is on; it can last for one hour.

Press any key on ⌚/⌚/▼/▲ to stop the alarm. After stop the alarm, it will be on again after 24 hours. To turn off alarm, press ⌚, the alarm indicator light goes out. Press ⌚ to turn on alarm, the circle dot lights up. When it begins to flash, it means the alarm clock only works for one time. When it stops to flash, it means the alarm clock works everyday. Press ⌚ to turn off alarm, the circle dot goes out.

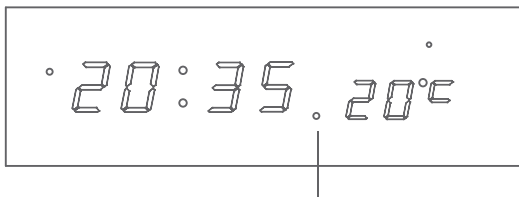


Fig.4 alarm function

ALARM

## 5.4 Bluetooth Function

When connecting the power with the unit, the unit is under Bluetooth mode.

Go to smartphone or the pairing device settings and turn on Bluetooth, searching Bluetooth devices. Choose “W1 by Homtime” to pair. When it is successfully paired, you will hear a “DU” sound. Music can be played from the paired device now. When playing music, press “PLAY” to pause. Press it again to continue music (See Fig.5). Hold and press “+” and “-” to volume up and down.

## 5.5 Handsfree Function

When playing music under Bluetooth mode, the phone call is coming in, press “PLAY” to answer the call. Press “PLAY” to end the call, the music playing continues.

## 5.6 AUX-in Jack

When the unit is on, connect the device to “AUX-in” jack on the back of the unit with a 3.5mm stereo audio cable. The unit will switch to AUX mode automatically and play AUX-in audio sources only (See Fig.6).

## 5.7 Temperature Display Setting

Fahrenheit or Celsius. Long press ▲ + ▼ for 5 seconds to display C/F, press ▲ to switch to C, press ▼ to switch to F. Press ⌚ or ⌚ to confirm the setting.

## 5.8 USB outlet port

USB outlet port available for wiring additional USB cables to power other devices

## 6 Playing and Connection diagram

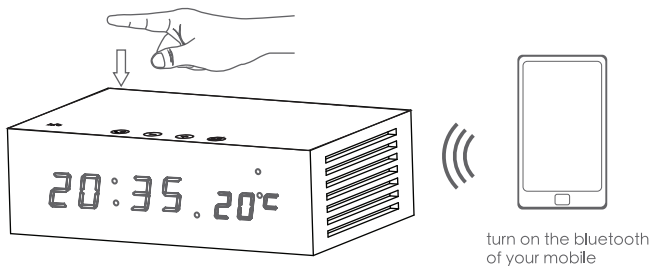


Fig.5  pause/play/answer call/hang up/turn off Bluetooth

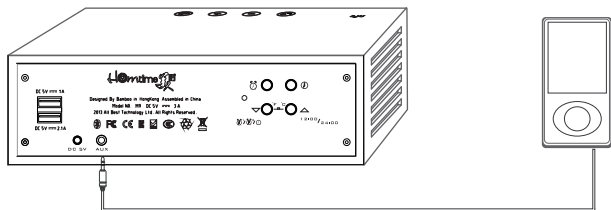


Fig.6 play aux-in audio sources

## 7 Disposal of your old product

The crossed-out wheeled trash can symbol on the rating label indicates that this product is covered by the European Directive 2002/96/EC.



Shanghai Funner Electronic Technology Co.,Ltd.

[www.homtime.com](http://www.homtime.com)